

Backwashing/Acid Neutralizing Filters

MODEL	APBF-1054	APBF-1054	APBF-1054
Mineral Type	Carbon	Turbidex	Calcite or Mix
Amount (Cu. Ft.)	1.5	1.5	1.5
Continuous Flow (GPM)	5.0	7.0	4.8
Peak Flow (GPM)	9.0	11.0	11.0
Backwash Flow (GPM)	5.3	9.0	5.3
Total Dimensions	10"W x 62"H	10"W x 62"H	10"W x 62"H
Weight:			
Unfilled/Media (Lbs)	66/50	66/75	66/135

Air Filter

MODEL	APIS-1054
Mineral Type	Catalytic Carbon
Amount (Cu. Ft.)	1.0
Service Flow (GPM)	5.0
¹ Peak Flow (GPM)	8.0
Backwash Flow (GPM)	5.3
² Hydrogen Sulfide/Iron Reduction	5.0
pH Range	Greater than 7.0
Total Dimensions	10"W x 62"H
Weight Filled (Lbs.)	99

¹ Not tested at peak flow rate. Water quality will vary.


² Hydrogen Sulfide and Iron reduction may vary depending on local conditions. A maximum combined total of Hydrogen Sulfide and Iron must be 5.0ppm or less.

Cycle Times & Usage

MODEL	APBF-1054	
	MIN.	GAL.
Backwash	5	27
Rapid Rinse	1	5
Backwash	5	27
Rapid Rinse	4	21
Total	15	80


MODEL	APIS-1054	
	MIN.	GAL.
Backwash Air	4	16
Backwash	10	50
Regenerant Draw	60	25
Total	74	91

MODEL	APBF-1054 CARBON		APBF-1054 TURBIDEX		APBF-1054 CALCITE OR MIX	
	MIN.	GAL.	MIN.	GAL.	MIN.	GAL.
Backwash	5	27	5	45	5	27
Rinse	1	5	1	9	1	5
Backwash	5	27	5	45	5	27
Rinse	4	21	4	36	4	21

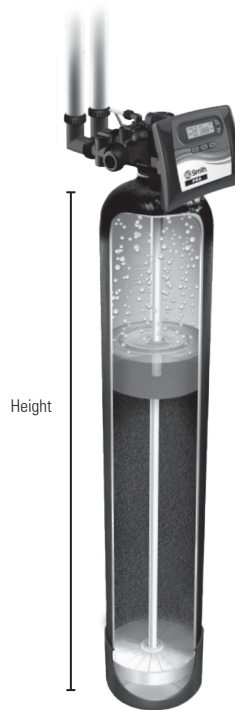

Width

Air Filter

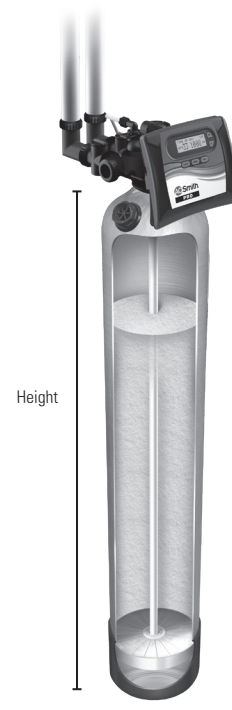

Width

Backwashing Filter